



## YARRA

Light in colour, the Yarra series has a realistic travertine effect and is perfect for inviting the sought-after natural look into any interior space. Available in three sizes, two finishes and two colours: a soothing silvery grey and a warming white hue.



# YARRA



600x600mm  
Polished and  
matt finish

300x600mm  
Polished  
and matt  
finish

300x300mm  
Matt  
finish  
only

**Matt  
Finish**



Matt

**Glazed  
Porcelain**

**V2**  
Variation

**Rectified  
Edge**



Polished

**Polished  
Finish**

GNS Ceramics recommends that our retail shops pass on the following information to the installer and end-user.



Click or Scan for  
Installation Instructions


Ceramic tiles are only one component of a much larger building system. It is our experience that failure of any tiling system is very often the result of a combination of factors. For example; inappropriate design, type of substrate, surface preparation, temperature during installation, adhesives, incompatibility of products, product failure, environmental factors skill and knowledge of the installers etc; the latter being supplied or controlled by a variety of manufacturers and tradesmen. GNS Ceramics has no involvement in the design, selling and installation processes and once goods have been dispatched from our warehouse we have no control over where and how these products are used. As a result the project manager, and or the tiler are the only people in a position to ensure that all the components used in a project are compatible and that the product is installed in accordance with the Australian Building Code and the Australian Standards.

Installation Instructions for all types of tiles can be found in the GNS Ceramics Price List, and on our website. We suggest these are followed at all times.

### Cleaning and Maintenance

Do not use abrasive cleaners and chemicals which could permanently scratch and damage the surface of the tile. For daily cleaning we recommend the use of a mild PH Neutral detergent. Should a more vigorous cleaning programme be required we recommend the use of a proprietary tile cleaner from a specialty tile supplier.

### Colour & Pattern Variation Guide

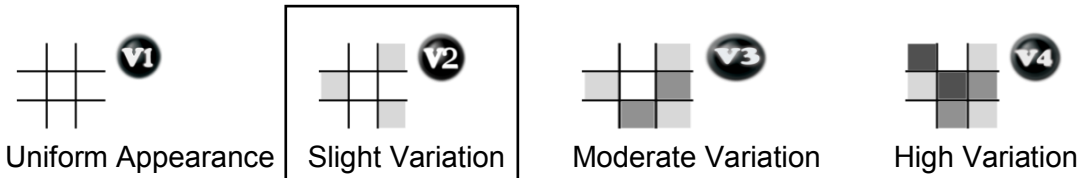

### Classes of Use

The classification has taken into account the recommendations of the Australian Standards; however, they are given for general guidance only. They are valid for the given application under **NORMAL CONDITIONS** and should not be taken to provide accurate product specifications for specific requirements.

**WARNING: Other standards and building code requirements may affect your selection of tiles.**

Consideration should be given to the footwear, type of pedestrian traffic and cleaning methods expected. Floors should be adequately protected against soiling from following trades during installation; they should also be protected against scratching dirt at the entrances to building by interposing footwear cleaning devices. For example, mats, shoe scrapers, static devices, etc.

**CLASS 3** - Floor coverings in areas that, with normal footwear, are walked on more often with small amounts of scratching dirt; for example, living areas, bedrooms, residential kitchens, laundries with internal access, halls and corridors. This does not apply to abnormal footwear; i.e. work boots and outdoor shoes.

**CLASS 4** - Floor coverings that are walked on by regular traffic with some scratching dirt so that conditions are more severe than CLASS 3; For example, entrances, laundries with external access, living areas, entertainment areas, patio's, sales rooms, motels.

# TRAVERTINO PRODUCT SPECIFICATION

## GLAZED PORCELAIN FLOOR TILE

Pressed Ceramic Tiles International Norm

ISO 13006-10545/98

GROUP: B1a



No.	Icon	Test item	Unit	Requirements of Standard		Specifica- tion	Requirement
1		Dimensional variation	(%)	length of side	±0.6	< 0.6	Qualified
2		Side straightness	(%)	± 0.5		< 0.5	Qualified
3		Squareness	(%)	± 0.5		< 0.5	Qualified
4		Surface flatness	(%)	Center curvature degree	± 0.5	< 0.5	Qualified
				Warping degree	± 0.5	< 0.5	Qualified
				Side curvature degree	± 0.5	< 0.5	Qualified
5		Surface quality	—	Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile		conformed	Qualified
6		Water absorption	(%)	Average value ≤ 0.5		< 0.2	Qualified
7		Breaking strength	N	When thickness ≥ 7.5mm the Average value ≥ 1300		> 1300	Qualified
8		Rupture modulus	Mpa	Average value ≥ 35 individual ≥ 32		> 35 > 32	Qualified
9		Abrasion resistance	Revs	750,1500,2100,6000,12000		> 12000	Qualified
10		Hardness	MOHS	Mohs Scale		> 6	Qualified
11		Frost resistance	—	No cracking after test		conformed	Qualified
12		Resistance to acids & alkalis	—	not less than grade GB		Grade GA	Qualified
13		Chemical resistance	—	not less than grade GB		Grade GA	Qualified